



PH508-1XX-XXX

Pin Header
 Pitch 5.08mm
 Single Row

Type1/Type2





 No.of Pins
 Single Row:1~20

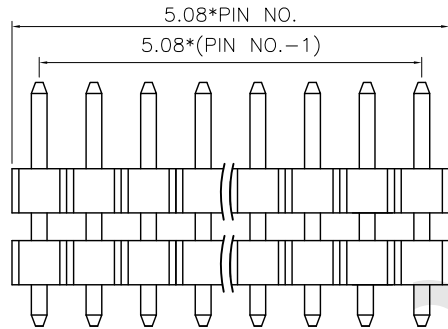

DIM A	DIM B	DIM C	DIM D	DIM E
3.00	7.00	5.00	3.00	6.00
.....

产品规范 PRODUCT SPECIFICATION

- 绝缘材质 INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- 端子材质 TERMINAL MATERIAL : COPPER ALLOY .
- 端子电镀 FINISH : GOLD OR TIN PLATED.
- 额定电流 CURRENT RATING : 9 AMPERE.
- 绝缘阻抗 INSULATION RESISTANCE : 1000M OHMS MIN.
- 耐电压 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
- 接触阻抗 CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
测试后 Final : 40 m Ohm Max. .
- 操作温度范围 OPERATING TEMPERATURE : - 40°C to +105°C.

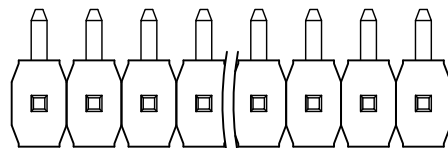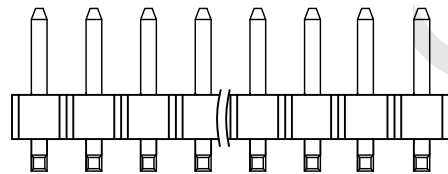

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD					
 THIRD ANGLE PROJECTION		CHEK	08Jan2016						
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	Abel	08Jan2016	NAME	Pin Header 5.08mm Single Row DIP Type	
0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°		PRODUCT SPEC		SIZE	A4	DRAWING No.	YL-ED-XXX		
		WEIGHT		CUSTOMER DRAWING		SCALE	1 : 1	SHEET	1 OF 1