


DIM E	DIM F	DIM A	DIM B	DIM C	DIM D	DIM G
1.00	2.00	3.90	4.50	6.00	3.80	8.00
1.50		5.00	5.00	6.50	4.00	9.00
2.00	

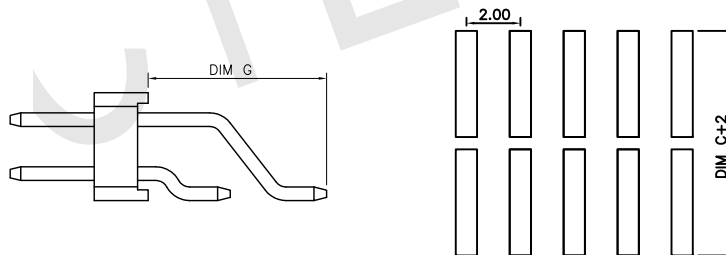

产品规范 PRODUCT SPECIFICATION

- 绝缘材质 INSULATOR MATERIAL : POLYESTER, UL94V-0.
- 端子材质 TERMINAL MATERIAL : COPPER ALLOY .
- 端子电镀 FINISH : GOLD OR TIN PLATED.
- 额定电流 CURRENT RATING : 2 AMPERE.
- 绝缘阻抗 INSULATION RESISTANCE : 1000M OHMS MIN.
- 耐电压 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
- 接触阻抗 CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
测试后 Final : 40 m Ohm Max. .
- 操作温度范围 OPERATING TEMPERATURE : - 40°C to +105°C.

PH200-XXX-XXX

Pin Header
Pitch 2.00mm
2: Dual Row
1: Single Row

Type1/Type2
.....
No. of Pins
Dual Row: 2~40
Single Row: 1~52

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD		
<p>THIRD ANGLE PROJECTION</p>		CHEK	08Jan2016			
		NAME		Pin Header 2.00mm SMT Type		
		DRAWING No.		YL-ED-XXX		
		SCALE		1 : 1	SHEET 1 of 1	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	08Jan2016	SIZE		A4
0 PLC ± 0.50		PRODUCT SPEC	—	CUSTOMER DRAWING		
1 PLC ± 0.30		WEIGHT	—			
2 PLC ± 0.20						
3 PLC ± 0.15						
4 PLC ± —						
ANGLES ± 3°						