



PH250-XXX-XXX

Pin Header
 Pitch 2.50mm
 1:Single Row

Type1/Type2


 No.of Pins
 Single Row:1~40

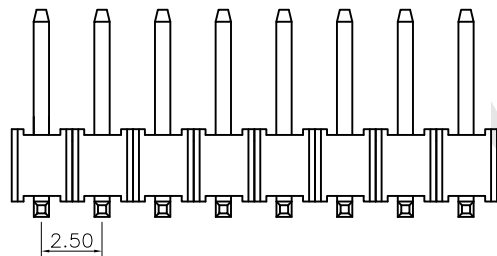


DIM A	DIM B	DIM C	DIM D
5.00	3.00	5.00	3.00
.....

产品规范 PRODUCT SPECIFICATION

1. 绝缘材质 INSULATOR MATERIAL : POLYESTER, UL94V-0 .
2. 端子材质 TERMINAL MATERIAL : COPPER ALLOY .
3. 端子电镀 FINISH : GOLD OR TIN PLATED .
4. 额定电流 CURRENT RATING : 3 AMPERE .
5. 绝缘阻抗 INSULATION RESISTANCE : 1000M OHMS MIN .
6. 耐电压 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE .
7. 接触阻抗 CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max . ;
测试后 Final : 40 m Ohm Max . .
8. 操作温度范围 OPERATING TEMPERATURE : - 40°C to +105°C .

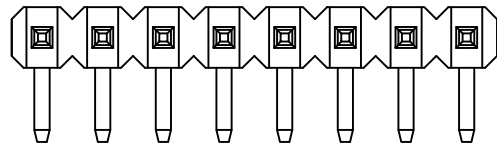

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
		CHEK	08Jan2016		
		APVD	Abel	08Jan2016	NAME
		PRODUCT SPEC			Pin Header 2.50mm DIP Type
		WEIGHT			SIZE
		CUSTOMER DRAWING			A4
				DRAWING No.	YL-ED-XXX
				SCALE	1 : 1
				SHEET	1 of 1



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± 0.50
1 PLC	± 0.30
2 PLC	± 0.20
3 PLC	± 0.15
4 PLC	± -
ANGLES	± 3'