

PH254-XXX-XXX

Pin Header

Pitch 2.54mm

4:Four Row

3:Three Row

2:Dual Row

1:Single Row

Type1/Type2

.....









No.of Pins

Four Row:4~40

Three Row:3~40

Dual Row:2~50

Single Row:1~41

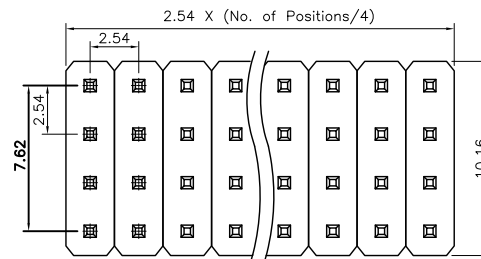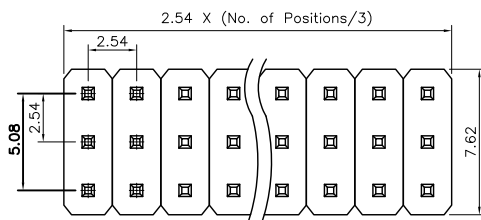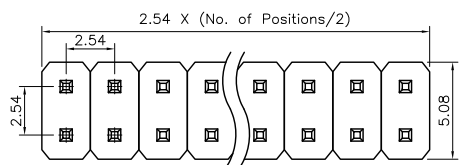

DIM A	DIM B	DIM C	DIM H	DIM M
6.00	3.00	8.00	1.50	1.50
.....	2.00	2.00
			2.54	2.54

产品规范 PRODUCT SPECIFICATION

- 绝缘材质 INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- 端子材质 TERMINAL MATERIAL : COPPER ALLOY .
- 端子电镀 FINISH : GOLD OR TIN PLATED.
- 额定电流 CURRENT RATING : 3 AMPERE.
- 绝缘阻抗 INSULATION RESISTANCE : 1000M OHMS MIN.
- 耐电压 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
- 接触阻抗 CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
测试后 Final : 40 m Ohm Max. .
- 操作温度范围 OPERATING TEMPERATURE : - 40°C to +105°C.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD			
THIRD ANGLE PROJECTION		CHEK	08Jan2016				
		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°		APVD	08Jan2016	NAME	Pin Header 2.54mm DIP Type
		PRODUCT SPEC	-	SIZE	A4	DRAWING No.	YL-ED-XXX
		WEIGHT	-	CUSTOMER DRAWING		SCALE	1 : 1
						SHEET	1 OF 1