




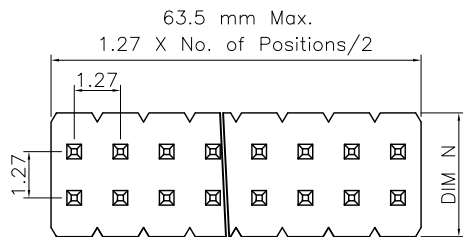



DIM H	DIM M	DIM N
1.00	1.00	3.40
1.50	1.50	3.00
1.70	1.70	
2.00	2.00	
2.50	2.50	

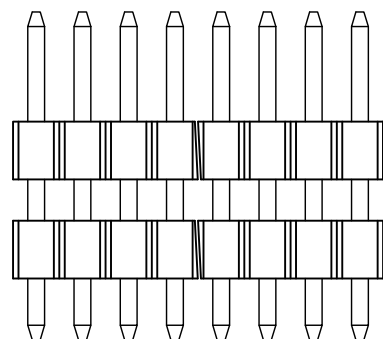

DIM A	DIM B	DIM C
4.00	2.50	4.00
5.50	3.00	5.00
.....

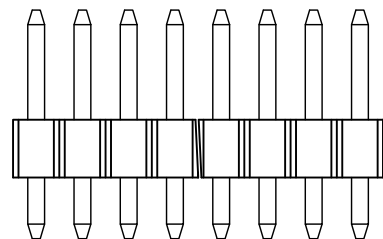

PH127-XXX-XXX



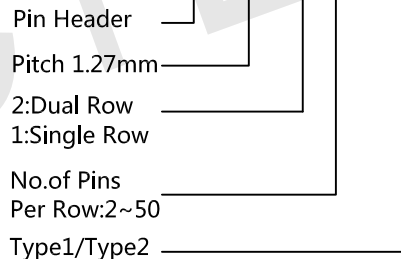


产品规范 PRODUCT SPECIFICATION




1. 绝缘材质 INSULATOR MATERIAL : POLYESTER, UL94V-0 .
2. 端子材质 TERMINAL MATERIAL : COPPER ALLOY .
3. 端子电镀 FINISH : GOLD OR TIN PLATED.
4. 额定电流 CURRENT RATING : 1 AMPERE.
5. 绝缘阻抗 INSULATION RESISTANCE : 1000M OHMS MIN.
6. 耐电压 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
7. 接触阻抗 CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ; 测试后 Final : 40 m Ohm Max. .
8. 操作温度范围 OPERATING TEMPERATURE : - 40°C to +105°C.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
		CHEK	08Jan2016		
		APVD	Abel 08Jan2016	NAME Pin Header 1.27mm DIP Type	
		PRODUCT SPEC	—	SIZE	DRAWING No.
		WEIGHT	—	A4	YL-ED-XXX
THIRD ANGLE PROJECTION		CUSTOMER DRAWING		SCALE	SHEET
				1 : 1	1 of 1


TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC	± 0.50
1 PLC	± 0.30
2 PLC	± 0.20
3 PLC	± 0.15
4 PLC	± —
ANGLES	± 3'

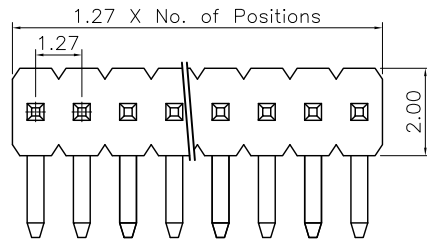


DIM H	DIM M	DIM N
1.00	1.00	3.40
1.50	1.50	3.00
1.70	1.70	
2.00	2.00	
2.50	2.50	

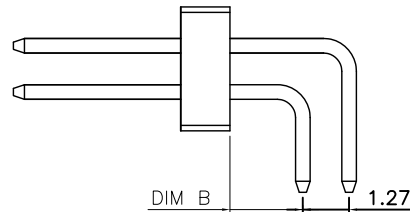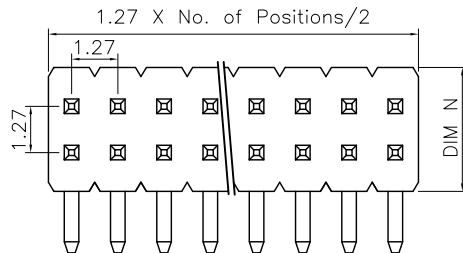

DIM A	DIM B	DIM C
2.50	0.50	4.00
3.00	1.00	5.00
.....

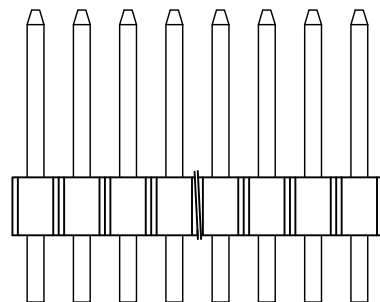

PH127-XXX-XXX

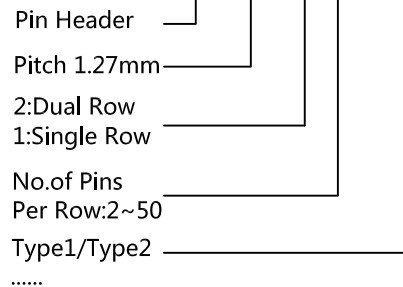

产品规范 PRODUCT SPECIFICATION

- 绝缘材质 INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- 端子材质 TERMINAL MATERIAL : COPPER ALLOY .
- 端子电镀 FINISH : GOLD OR TIN PLATED.
- 额定电流 CURRENT RATING : 1 AMPERE.
- 绝缘阻抗 INSULATION RESISTANCE : 1000M OHMS MIN.
- 耐电压 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
- 接触阻抗 CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
测试后 Final : 40 m Ohm Max. .
- 操作温度范围 OPERATING TEMPERATURE : - 40°C to +105°C.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD													
<p>THIRD ANGLE PROJECTION</p>		CHEK	08Jan2016														
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME													
<table border="0"> <tr><td>0 PLC</td><td>± 0.50</td></tr> <tr><td>1 PLC</td><td>± 0.30</td></tr> <tr><td>2 PLC</td><td>± 0.20</td></tr> <tr><td>3 PLC</td><td>± 0.15</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± 3'</td></tr> </table>		0 PLC	± 0.50	1 PLC	± 0.30	2 PLC	± 0.20	3 PLC	± 0.15	4 PLC	± -	ANGLES	± 3'	APVD	Abel	08Jan2016	Pin Header 1.27mm Right Angle Type
		0 PLC	± 0.50														
		1 PLC	± 0.30														
		2 PLC	± 0.20														
3 PLC	± 0.15																
4 PLC	± -																
ANGLES	± 3'																
PRODUCT SPEC	---																
CUSTOMER DRAWING		WEIGHT	---		SIZE	A4	DRAWING No.	YL-ED-XXX									
		SCALE		1 : 1	SHEET		1 of 1										