




PRODUCT SPECIFICATION




- 1.INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- 2.TERMINAL MATERIAL : COPPER ALLOY .
- 3.FINISH : GOLD OR TIN PLATED.
- 4.CURRENT RATING : 2 AMPERE.
- 5. NSULATION RESISTANCE : 1000M OHMS MIN.
- 6. DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
- 7. CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
测试后 Final : 40 m Ohm Max. .
- 8. OPERATING TEMPERATURE : - 40°C to +105°C.

DIM A	DIM B	DIM C
2.00	6.20	4.00
4.00	6.00/6.50	4.00/4.50
4.30		
4.60		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08012016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD		
 THIRD ANGLE PROJECTION		CHEK 08Jan2016			NAME Female Header 2.00mm Dual Row SMT Type
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Abel 08Jan2016	DRAWING No. YL-ED-XXX
0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°		PRODUCT SPEC — WEIGHT —	SIZE A4	SCALE 1 : 1 SHEET 1 of 1	
		CUSTOMER DRAWING			

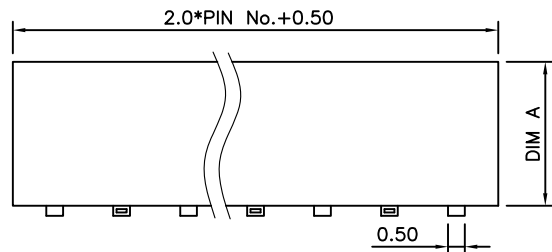


FH200-XXX-XXX
 Female Header Type1/Type2
 Pitch 2.00mm
 Single Row No.of Pins
 Single Row:2~40

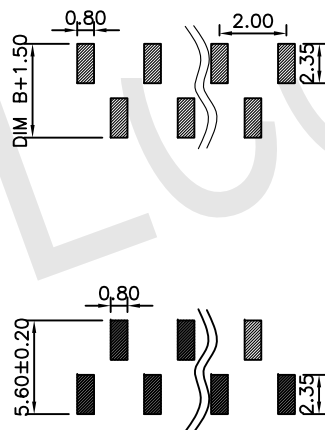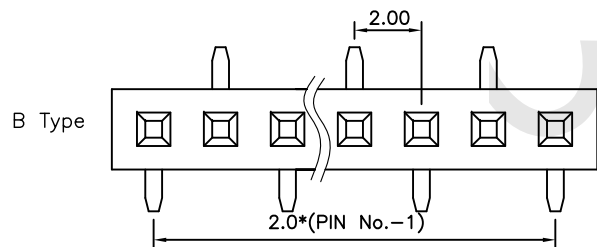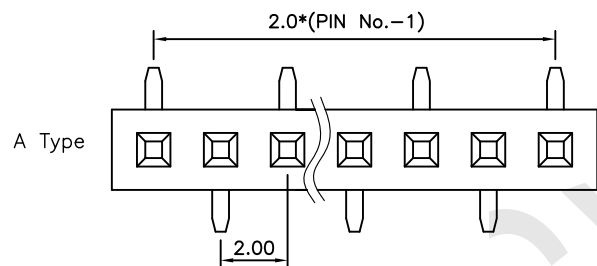

PRODUCT SPECIFICATION

- INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- TERMINAL MATERIAL : COPPER ALLOY .
- FINISH : GOLD OR TIN PLATED.
- CURRENT RATING : 2 AMPERE.
- INSULATION RESISTANCE : 1000M OHMS MIN.
- DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
- CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
测试后 Final : 40 m Ohm Max. .
- OPERATING TEMPERATURE : - 40°C to +105°C.

DIM A	DIM B
2.00	4.10
4.00	
4.30	4.00/4.50
4.60	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08012016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD		
 THIRD ANGLE PROJECTION		CHEK 08Jan2016			NAME Female Header 2.00mm Single Row SMT Type
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Abel 08Jan2016	DRAWING No. YL-ED-XXX
		0 PLC ± 0.50	PRODUCT SPEC		
		1 PLC ± 0.30	WEIGHT	A4	
		2 PLC ± 0.20	CUSTOMER DRAWING	SCALE 1 : 1	SHEET 1 of 1
		3 PLC ± 0.15			
		4 PLC ± -			
		ANGLES ± 3°			