
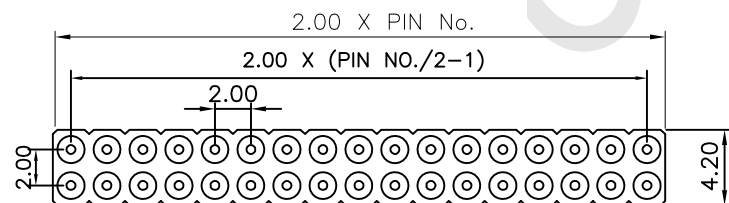


YL014-XXX-XXX

Machine Pin


019:Single Row
021:Dual Row

Single Row	Dual Row
002:02Pin	004:04Pin
003:03Pin	006:06Pin
****	****
040:40Pin	080:80Pin

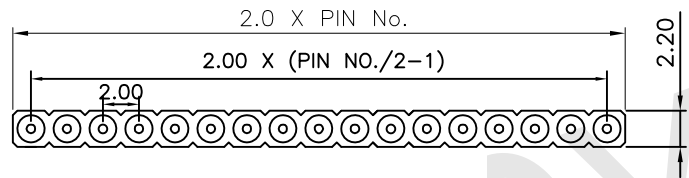

产品规范 PRODUCT SPECIFICATION

- 绝缘材质 INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- 端子材质 TERMINAL MATERIAL : COPPER ALLOY .
- 端子电镀 FINISH : GOLD OR TIN PLATED .
- 额定电流 CURRENT RATING : 3 AMPERE .
- 绝缘阻抗 INSULATION RESISTANCE : 1000M OHMS MIN .
- 耐电压 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE .
- 接触阻抗 CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max . ;
测试后 Final : 40 m Ohm Max . .
- 操作温度范围 OPERATING TEMPERATURE : - 40°C to +105°C .

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD						
 THIRD ANGLE PROJECTION		CHEK	08Jan2016							
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	Abel	08Jan2016	NAME	Machine Pin Header 2.00mm DIP Type		
0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°		PRODUCT SPEC	—		SIZE	A4	DRAWING No.	YL014-XXX		
		WEIGHT	—		CUSTOMER DRAWING		SCALE	1 : 1	SHEET	1 OF 1