


YL014-XXX-XXX

Machine Pin

XXX: Dual Row


Dual Row
004:04Pin
006:06Pin

080:80Pin

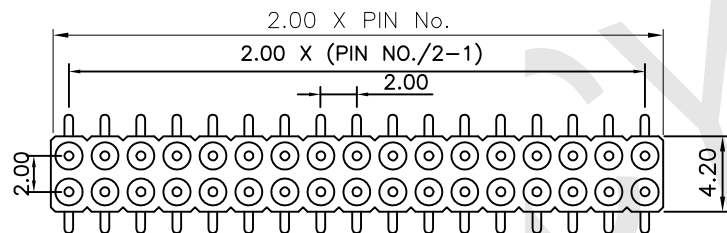

产品规范 PRODUCT SPECIFICATION

1. 绝缘材质 INSULATOR MATERIAL : POLYESTER, UL94V-0 .
2. 端子材质 TERMINAL MATERIAL : COPPER ALLOY .
3. 端子电镀 FINISH : GOLD OR TIN PLATED .
4. 额定电流 CURRENT RATING : 3 AMPERE .
5. 绝缘阻抗 INSULATION RESISTANCE : 1000M OHMS MIN .
6. 耐电压 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE .
7. 接触阻抗 CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
测试后 Final : 40 m Ohm Max. .
8. 操作温度范围 OPERATING TEMPERATURE : - 40°C to +105°C .

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
 THIRD ANGLE PROJECTION		CHEK	08Jan2016		
		APVD Abel	08Jan2016	SIZE	DRAWING No.
		PRODUCT SPEC	—	A4	YL014-XXX
		WEIGHT	—	SCALE 1 : 1	
		CUSTOMER DRAWING			