

REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD
A	RELEASED	01Jan16	AW	WK

**NOTE:**

**1. MATERIAL:**

HOUSING: PA-9T BLUE UL94V-0.  
 RJ CONTACT: PHOSPHOR BRONZE T=0.35mm.  
 SHELL: COPPER ALLOY T=0.20mm.  
 LED PIN: T=0.50mm.


**2. FINISH :**

RJ CONTACT: AU/100u" SN/50u" NI PLATED  
 SHELL : Ni PLATING

**3. MECHANICAL CHARACTERISTICS :**

INSERTION FORCE : 22N MAX.  
 REMOVAL FORCE (WITHOUT PLUG LOCK) : 22N MAX.  
 PLUG LOCKING RETENTION FORCE : 50N MIN./60sec  
 DURABILITY : 750 TIMES

**4. OPERATING TEMPERATURE : 0°C ~ 70°C**

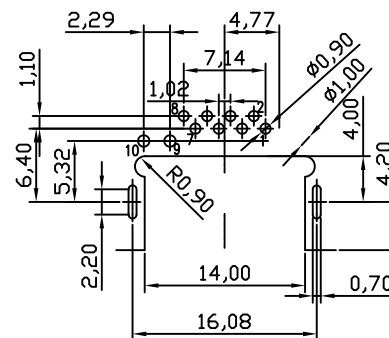

PCBLAYOUT TOP VIEW  
TOL:±0.05

YL005-015-XXX  
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. WU 01Jan2016	<b>东莞市宇亮电子有限公司</b> DONG GUAN YU LIANG ELECTRONICS CO., LTD
DIMENSIONS: mm		CHEK S. CHIEN 01Jan2016	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Abel 01Jan2016	NAME RJ45 沉板4.2 DIP直脚左绿右空
THIRD ANGLE PROJECTION		PRODUCT SPEC —	SIZE A4
ANGLES ± 3°		WEIGHT —	DRAWING No. Y=YL005-015
		CUSTOMER DRAWING	SCALE 1 : 1 SHEET 1 of 1