

REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD
A	RELEASED	01Jan16	AW	WK

NOTE:

1. MATERIAL:

HOUSING: THERMOPLASTIC BLACK UL94V-0.
 RJ CONTACT: PHOSPHOR BRONZE T=0.30mm.
 SHELL: COPPY ALLOY T=0.20mm.


2. FINISH :

RJ CONTACT: AU/100u" SN/50u" NI PLATED
 SHELL : NI PLATED

3. MECHANICAL CHARACTERISTICS :

INSERTION FORCE : 22N MAX.
 REMOVAL FORCE (WITHOUT PLUG LOCK) : 22N MAX.
 PLUG LOCKING RETENTION FORCE : 50N MIN./60sec
 DURABILITY : 750 TIMES

4. OPERATING TEMPERATURE : 0°C ~ 70°C

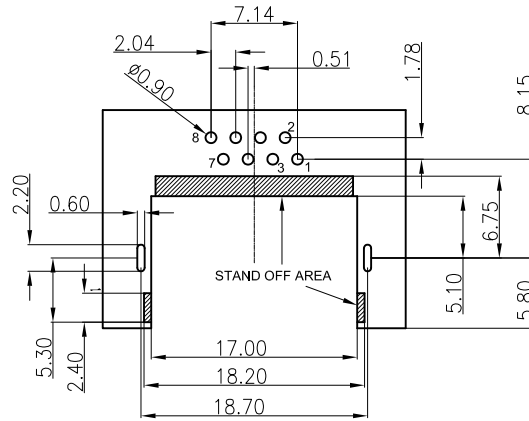

PCBLAYOUT TOP VIEW
 TOL:±0.05(THICKNESS=1.60)

YL005-018-XXX
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. WU 01Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
DIMENSIONS: mm		CHEK S. CHIEN 01Jan2016		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Abel 01Jan2016	NAME RJ45 沉板1.8 有壳无灯 8P8C DIP	
 THIRD ANGLE PROJECTION		PRODUCT SPEC —	SIZE A4	DRAWING No. Y=YL005-018
0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± — ANGLES ± 3°		WEIGHT —	CUSTOMER DRAWING	
		SCALE 1 : 1		SHEET 1 of 1