

REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD
A	RELEASED	01Jan16	AW	WK

备注:
材质


- 1.主体: LCP E130I 黑色 UL94V-0
 - 2.端子: C5191R-H T=0.30±0.02mm
 - 电镀:所有区镍底50u", 焊脚区镀锡100u", 接触区选择性刷金
 - 4.外壳: C2680R-H T=0.20±0.02 电镀镍30u"MIN
- 电气性能
- 1.额定电压:125VAC RMS.
 - 2.额定电流:1.5 AMP.
 - 3.接触阻抗:30MILLIOHMS MAX.
 - 4.绝缘阻抗:500MEGOHMS MIN 500V DC.

机械性能

- 1.耐久性:750次 MIN.

环境性能:

- 1.存储温度:-40°C~+85°C.
- 2.工作温度:0°C TO 70°C.

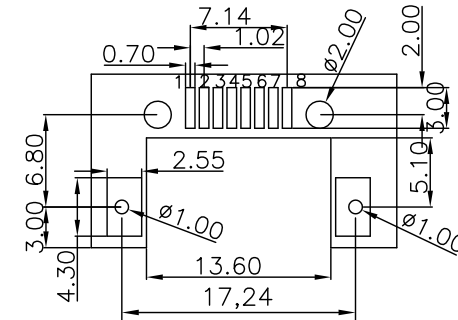

PCBLAYOUT TOP VIEW
TOL ±0.05

YL005-013-XXX
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. WU 01Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
DIMENSIONS: mm		CHEK S. CHIEN 01Jan2016		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Abel 01Jan2016	NAME RJ45沉板8.6 SMT全包	
THIRD ANGLE PROJECTION		PRODUCT SPEC —	SIZE A4	DRAWING No. Y=YL005-013
ANGLES ± 3°		WEIGHT —	CUSTOMER DRAWING	SCALE 1 : 1 SHEET 1 of 1